

Te.Ma.X

Industrie
Cotto Possagno

ROOFING





The strength of deep innovation, worthy of note.

Concrete. Industrie Cotto Possagno has created a line of earthenware products capable of providing concrete, dependable and innovative answers to the needs of builders and installers, who demand ease in installation, economy, beauty and safety.

Efficient. Thanks to the greater thickness and larger size with respect to the average tiles found on the market, 10 pieces of Te.Ma.X. per square metre are sufficient to lay a roof. This results in considerable savings in time, money and labour.

Safe. Te.Ma.X. is tested twice: in the Industrie Cotto Possagno's new production plants, every single tile is checked both manually and automatically, to guarantee absolute quality at all times.

Healthy. Like all other Industrie Cotto Possagno products, Te.Ma.X. is transpiring and guarantees perfect aeration of the attic. This is an indispensable characteristic to ensure the maximum healthfulness of the roof.





A great idea with 30 years of guarantee.

Te.Ma.X is a complete collection of accessories and finishing of various types, to be perfectly matched to any residential context: the most classical colours are enhanced by four elegant antiqued shades.

The mixture of special DSA clays with which the product is realised makes Te.Ma.X extremely resistant. That's why Industrie Cotto Possagno guarantees it for a good 30 years.

Te.Ma.X	
Length	~ 495 mm
Width	~ 320 mm
Weight	~ 4,9 kg
Pieces per sq m *	~ 10
Weight per sq m	~ 49 kg
Spacing from	from ~390 to ~400 mm
Pieces per bed	90

* Depending on the overlay.

TRADITIONAL LINE



**Te.Ma.X
Rossa**

code **RW01**



ANTIQUED LINE



**Te.Ma.X
Serenissima**

code **SW01**



**Te.Ma.X
Francia**

code **FW01**



**Te.Ma.X
Antica Possagno**

code **PW01**



**Te.Ma.X
Veneto Antico**

code **EW01**



In the event of gradients between 30% and 35%, the use of a transpiring impermeabilizing sheath is required. The special processing of the antiqued Te.Ma.X makes every piece different, to improve reproduction of the shades and colours taken on with time by ancient roofs. In order to improve the chromatic yield of the roof covering, it is recommended to use products from several different beds simultaneously. Given the nature of the material, the colours of the catalogue samples are indicative. Weights and measurements may be subject to variations. See the relative card for installation of the product.

This product complies with UNI EN 1304 – 1024 – 538 – 539/1 – 539/2 norms and the successive updates and is covered by a guarantee, which is subordinate to respect of the UNI norms UNI 8178 – 8627 – 9308/1 – 9460 – 10740 and the successive updates. The fidelity of colour, shades and tones of the sample product chosen is the maximum level permitted by our current technology, with the exception of normal variations caused by the passage of time.



TRADITIONAL LINE

Te.Ma.X Rossa



The classical roof tile, revisited in a modern key to bring tradition into the future.



ANTIQUED LINE

Te.Ma.X Serenissima

Iridescent shades enliven cosmopolitan magnificence, wrapped in an atmospheric play without boundaries.

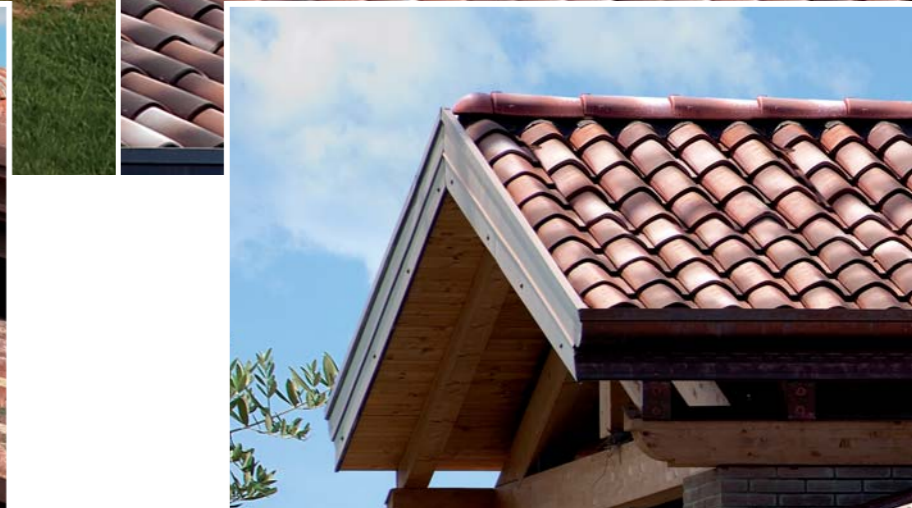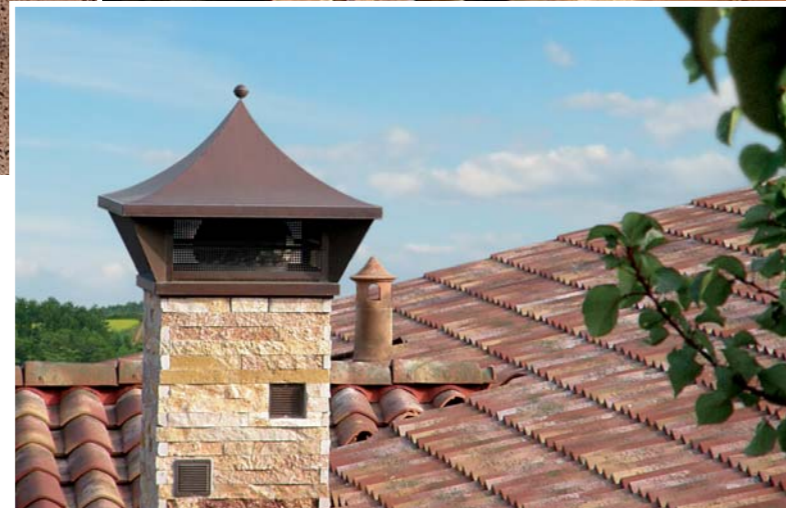

ANTIQUED LINE

Te.Ma.X Francia

The homage due to a vast cultural patrimony, which is still capable of providing strong suggestions.



ANTIQUED LINE

Te.Ma.X Antica Possagno

Dedicated to those who want to discover the timeless charm of living culture, every day.



ANTIQUED LINE




Te.Ma.X Veneto Antico

In the heart of an artisan tradition that is still alive today, we discover new aesthetic horizons.


Installation of Te.Ma.X

It is advisable to use splines to install the tiles quickly and ensure they are anchored well.

- Jolly Metal Tile
- Transparent sheaths for impermeabilization
- Metallic bird guard grid

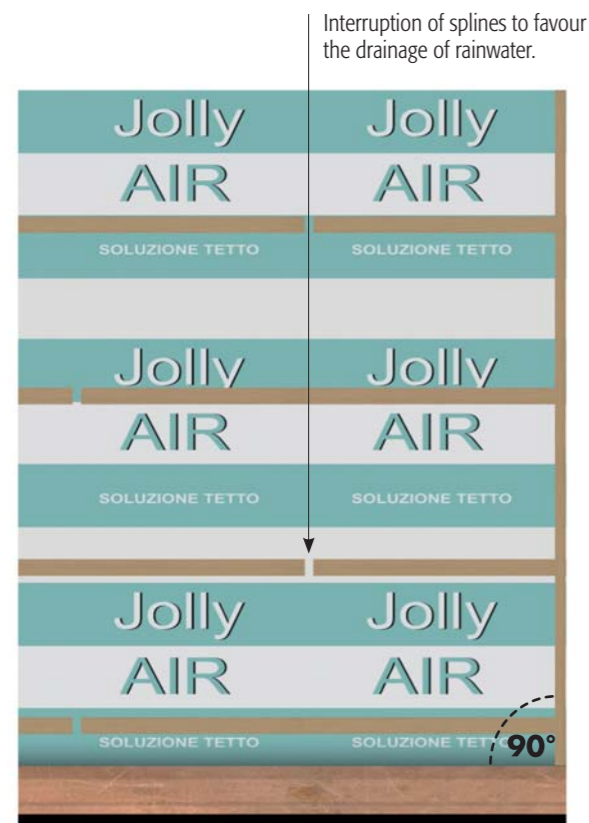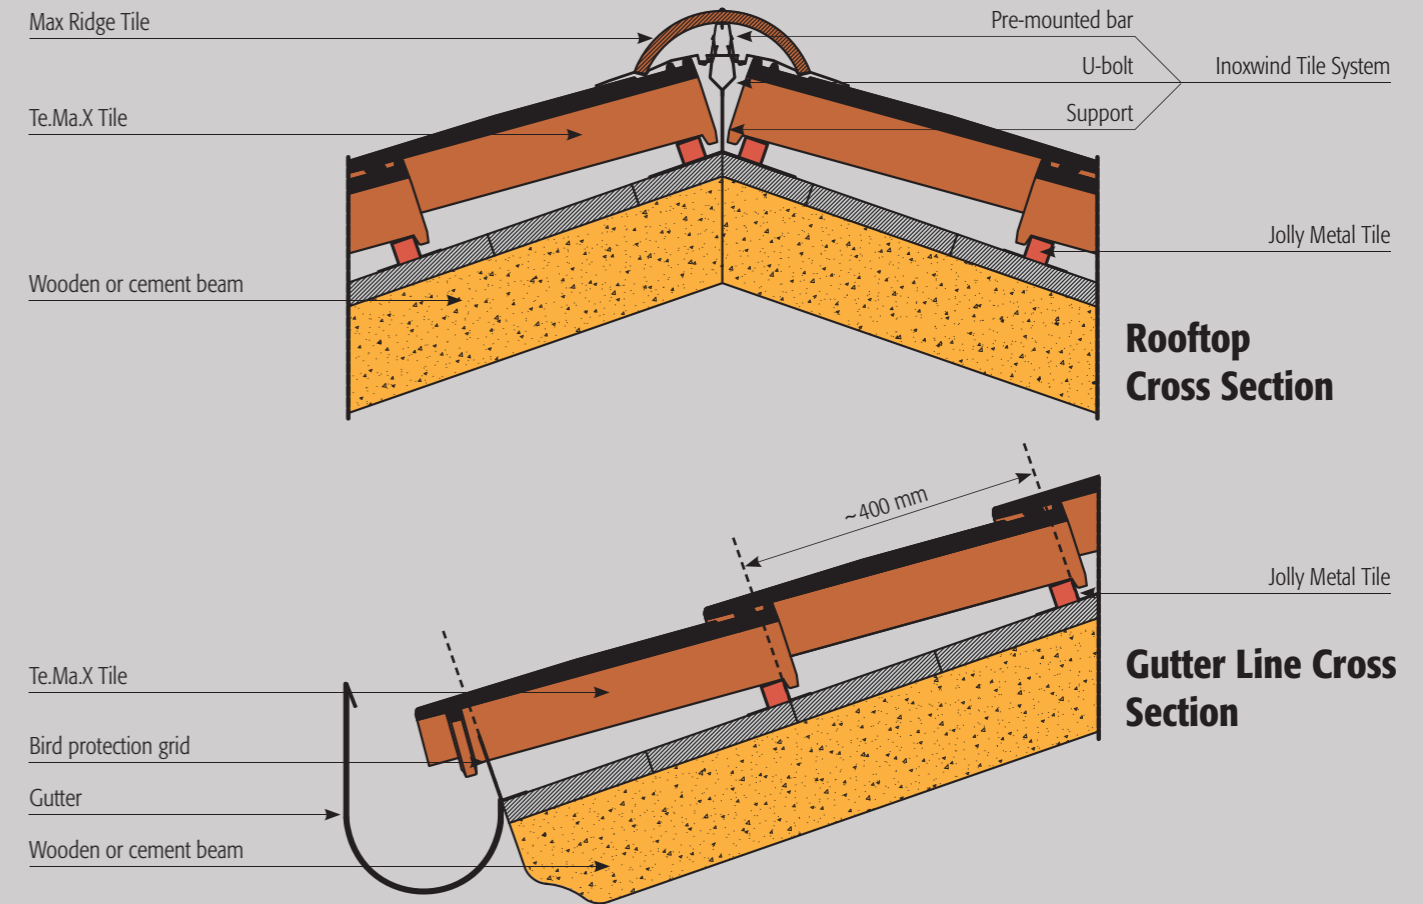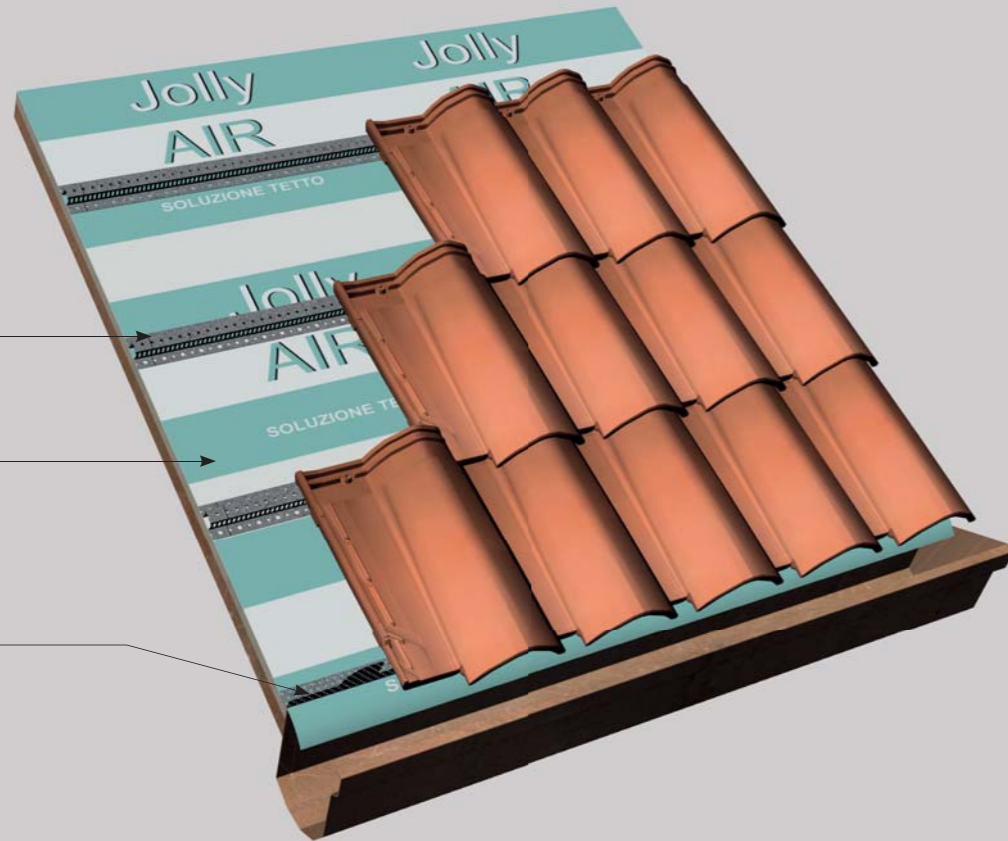

The gutter line must be perfectly perpendicular (with an angle of 90°) to the lateral ridge.

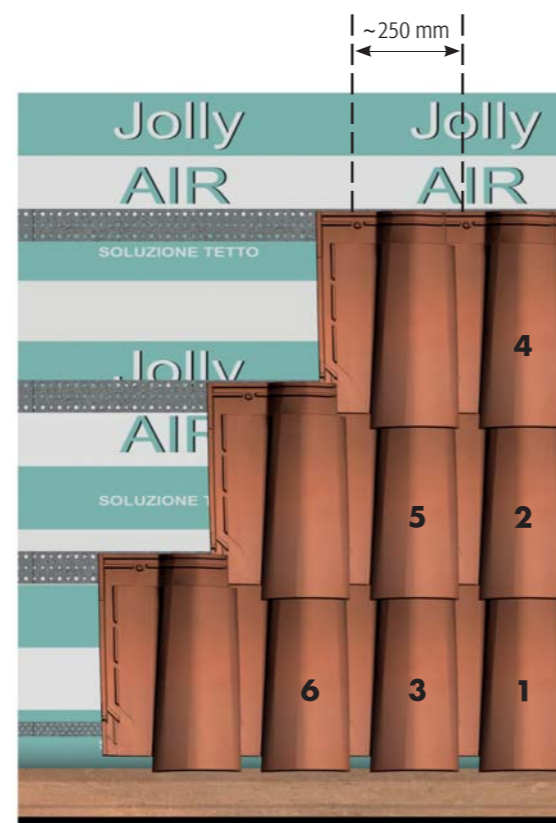

Installation of Te.Ma.X adapts well to Industrie Cotto Possagno S.p.A. metallic aeration and ventilation splines (Jolly Metal Tiles).

Installation

The first column of tiles is supported with a spline that is perpendicular to the gutter line, measuring 30x40 mm if the tiles are supported on longitudinal splines and 40x40 mm if they are laid directly on the outer layer of the roof. The first row of tiles must also be supported with a spline 15 mm thicker than the successive transversal splines, or by the bird protection grid.

In order to improve the chromatic yield of the roof covering, it is recommended to use products from several different beds simultaneously.

Items of Specification


Supply of discontinuous roof covering in earthenware tiles, made up of moulded tiles having a length of ~495 mm, a weight of ~4,9 kg and with ~10 pieces per sq m including the relative special pieces, such as ridge tiles, end pieces, aerating pieces, etc., to complete the roofing. The tiles must be in conformity with norms in force and are provided with the relative Te.Ma.X Tile type guarantee of Industrie Cotto Possagno S.p.A.

Table of gradients for Te.Ma.X

Gradient	from 30% to 45% (with simple laying on splines)
Gradient advised	35%
Transversal Spacing	~250 mm
Longitudinal Spacing	~400 mm
Pieces necessary per sq m (depending on the overlay)	~10 pezzi

NOTE: In the event of gradients between 35%, the use of a transpiring impermeabilizing sheath is required.

Gradient table for brick tile roof coverings

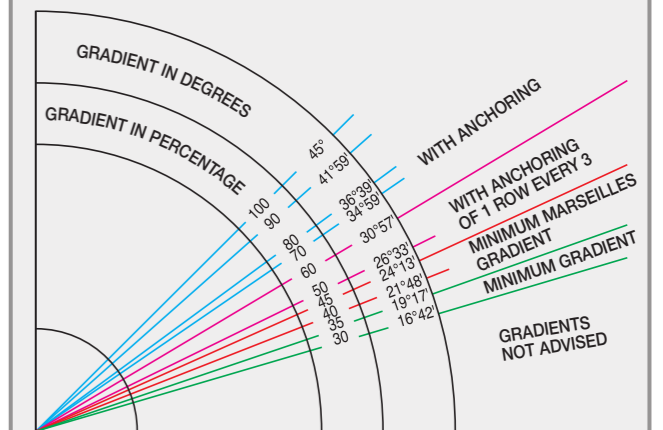

Gradients to use and overlays are indicated in the table above. Concerning the strength of the wind, refer to the Ministry of Public Works circular that divides the national territory into climatic zones (Circular n. 22631 dated 24.05.82).


For GUARANTEES and CERTIFICATIONS, please refer to the General Catalogue

Special pieces **TE.MA.X**

					
Max Ridge Tile	Max Ridge Tile w/Double Head	End Piece Max Ridge Tile	Front Piece Max Ridge Tile	Three Way Max Ridge Tile	Four Way Max Ridge Tile
code --20GR	code --23GR	code --30GR	code --80GR	code --40GR	code --41GR
					
Three Way Domed Tile	Four Way Domed Tile	Aerating Te.Ma.X tile with mesh	Te.Ma.X Snow blocking tile	Right Lateral Tile	Left Lateral Tile
code --44GR	code --45GR	code --50	code --71	code --72	code --73
					
Te.Ma.X Antenna Holder System	Te.Ma.X Complete Chimney System	Te.Ma.X Half-tile	Minitec Straight Ridge Tile Support	Minitec 45° Double face tile Left/Right Ridge Tile Support	
code --82	code --62	code --78	code --84	code --85	

This product complies with UNI EN 1304 – 1024 – 538 – 539/1 – 539/2 norms and the successive updates and is covered by a guarantee, which is subordinate to respect of the UNI norms UNI 8178 – 8627 – 9308/1 – 10740 and the successive updates. The fidelity of colour, shades and tones of the sample product chosen is the maximum level permitted by our current technology, with the exception of normal variations caused by the passage of time.

Industrie Cotto Possagno S.p.A. reserves the right to make modifications and variations to this catalogue at any time, with no advance notice. This catalogue supersedes and cancels all previous editions.



INDUSTRIE COTTO POSSAGNO S.p.A.

Via Molinetto, 80 - 31054 Possagno (TV) - Italy - info@cottopossagno.com - www.cottopossagno.com

Sales Office: Tel. +39 0423 920.777 - Fax +39 0423 920.707 - Ventilated Roof Division: Tel. +39 0423 920.701 - Fax +39 0423 920.703

Fiscal Code, VAT & TV Company Registry no. 03321030268 - Treviso Administrative Economic Listing no. 262004 - Fully Deposited Capital € 25,500,000.00