

# Unicoppo Extra

Industrie  
Cotto Possagno

ROOFING



**UNICOPPO**  
Extra





## Technological innovation dons natural grace.

The undulated profile of a landscape sweetly modelled by the wind and water inspired Industrie Cotto Possagno designers to create the Unicoppo Extra, a revolutionary roofing system that re-invents the traditional Possagno roof tile, creating an ancient yet simultaneously new shape. Produced with pure and generous Possagno clay in highly advanced technological works, in respect of the most rigorous quality standards, bio-compatibility and resistance, which the company demands of all of its products, Unicoppo Extra is destined to revolutionised the market of roof coverings and to last for a long time: like the rivers and hills.







## All the expressions of a unique style.

Unicoppo Extra is created in various lines that take into consideration the special uses and most refined aesthetic requirements: Linea Tradizione (Traditional Line), Linea Plus, Linea Antichizzata (Antiqued Line) and the hand made type. Each of these models responds to the demands of an increasingly attentive and expert market and guarantees the best result from both the architectural and functional points of view. The result achieved is a complete range that brings out the consolidated values of artisan craftsmanship, care and competence, in every context.

Unicoppo Extra	
Length	~490 mm
Width	~280 mm
Weight	~4.2 kg
Pieces per m <sup>2</sup> *	~12.5
Weight per m <sup>2</sup>	~51.0 kg
Pitch	~370 - 380 mm
Pieces per pellet	120

\* Depending on the overlay.

TRADITIONAL LINE



PLUS LINE



ANTIQUED LINE



HAND MADE TYPE



<b>Unicoppo Extra Rosso (Red)</b> code <b>RU01G</b>	<b>Unicoppo Extra Chiaro stonalizzato (Faded light)</b> code <b>CU01G</b>	<b>Unicoppo Extra Ardesia</b> code <b>IU01G</b>	<b>Unicoppo Extra Doppia Stella Alpina® (Double Alpine Star)</b> code <b>DU01G</b>	<b>Unicoppo Extra Antica Possagno (Antiqued Possagno)</b> code <b>PU01G</b>	<b>Unicoppo Extra d'Autore (Designer)</b> code <b>TU01G</b>	<b>Unicoppo Extra Francia (France)</b> code <b>FU01G</b>	<b>Unicoppo Extra Serenissima</b> code <b>EU01G</b>	<b>Unicoppo Extra Sicilia Antica (Ancient Sicily)</b> code <b>SU01G</b>	<b>Unicoppo Extra Vecchia Fornace (Old Furnace)</b> code <b>VU01G</b>	<b>Unicoppo Extra Veneto Antico (Ancient Venice)</b> code <b>AU01G</b>	<b>Unicoppo Extra Serenissima Hand Made Type</b> code <b>EU01GH</b>

In the event of gradients between 30% and 35%, the use of a transpiring impermeabilising sheath is required. The special processing of the antiqued Unicoppo Extra makes every piece different, to improve reproduction of the shades and colours taken on with time by ancient roofs. In order to improve the chromatic yield of the roof covering, it is recommended to use products from several different beds simultaneously. Given the nature of the material, the colours of the samples and catalogue are indicative. Weights and measurements may vary. See the relative card for installation of the product.

This product complies with UNI EN 1304 - 1024 - 538 - 539/1 - 539/2 norms and the successive updates and is covered by a guarantee, which is subordinate to respect of the UNI norms. UNI 8178 - 8627 - 9308/1 - 9460 - 10740 and the successive updates. The consistency of the colours, shades and tones of the product sample chosen is the best allowed by current technology, with the exception of normal variations caused by the passage of time.





TRADITIONAL LINE

**Unicoppo Extra Rosso**  
(Red)

The classical roof tile, revisited in a modern key to bring tradition into the future.

TRADITIONAL LINE

**Unicoppo Extra Chiaro stonalizzato**  
(Faded light)

Attractive chromatic features that adapt to the most elegant and dynamic taste.

PLUS LINE

**Unicoppo Extra Ardesia\***

The colour of stone reveals the pleasure of the most audacious and modern stylistic choices.

\*The product may have some points of "non-uniformity" in colour, as a result of its technical and productive features.





PLUS LINE



**Unicoppo Extra Doppia Stella Alpina®**  
(Double Alpine Star)

A product that achieves top elegance to resist at every altitude.

ANTIQUED LINE

**Unicoppo Extra Antica Possagno**  
(Antiqued Possagno)

Dedicated to those who want to discover the timeless charm of living culture, every day.

ANTIQUED LINE

**Unicoppo Extra d'Autore**  
(Designer)

A masterpiece born to leave an indelible mark on the entire architectural landscape.





ANTIQUED LINE  
**Unicoppo Extra Francia**  
 (France)

The homage due to a vast cultural patrimony, which is still capable of being strongly suggestive.

ANTIQUED LINE  
**Unicoppo Extra Serenissima**

Iridescent shades enliven cosmopolitan magnificence, wrapped in an atmospheric game without boundaries.

ANTIQUED LINE  
**Unicoppo Extra Sicilia Antica**  
 (Ancient Sicily)

Where the sky and land merge, warm chromatic combinations are born, capable of igniting your imagination.





ANTIQUED LINE

**Unicoppo Extra Vecchia Fornace**  
(Old Furnace)

A return to the origins, to valorise the material and rediscover the taste of familiar panoramas.

ANTIQUED LINE

**Unicoppo Extra Veneto Antico**  
(Ancient Venice)





In the heart of an artisan tradition that is still alive today, we discover new aesthetic horizons.

HAND MADE TYPE

**Unicoppo Extra Serenissima**  
Hand Made Type

Just touch the surface of this product to feel its solidity and deep ties with history.



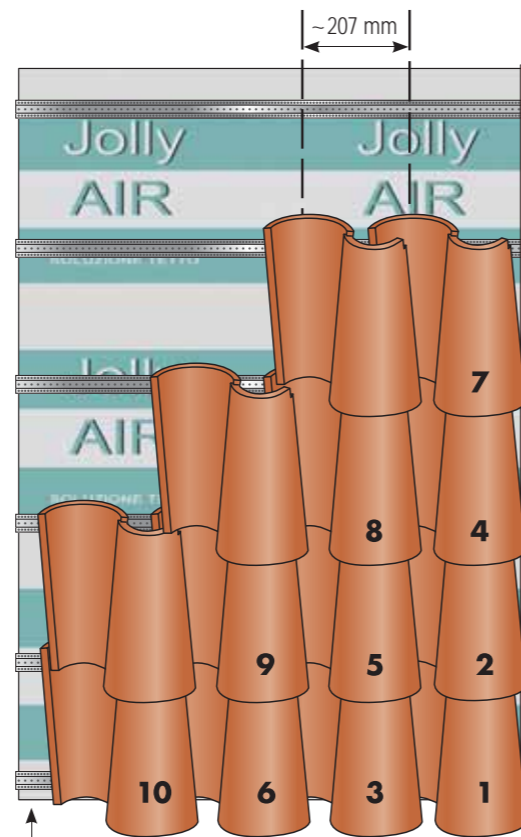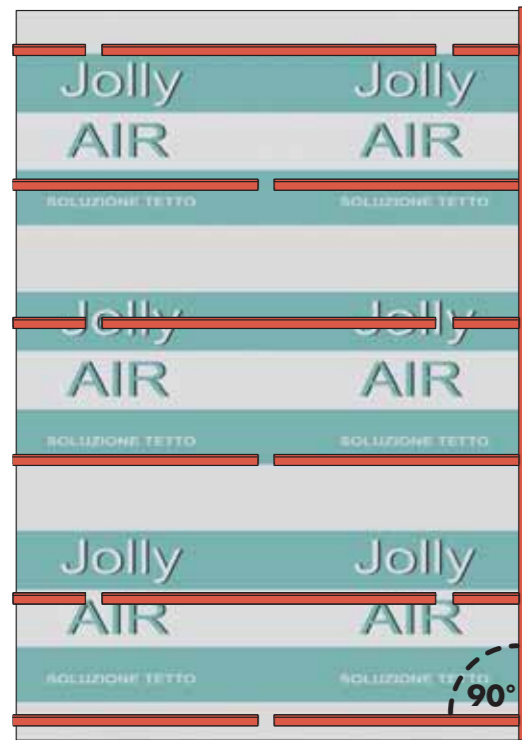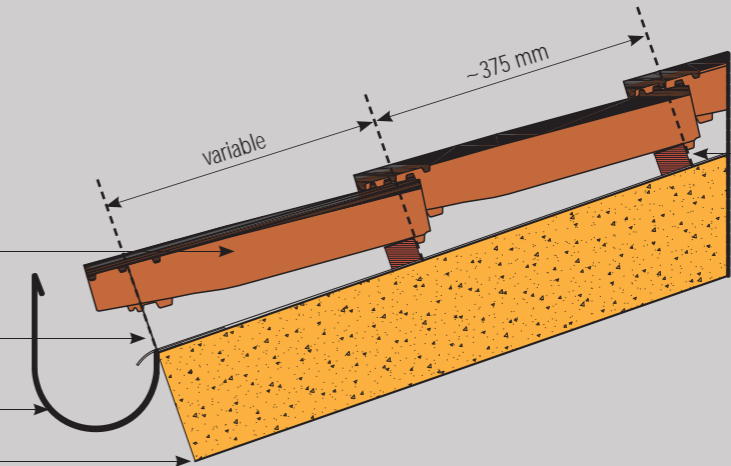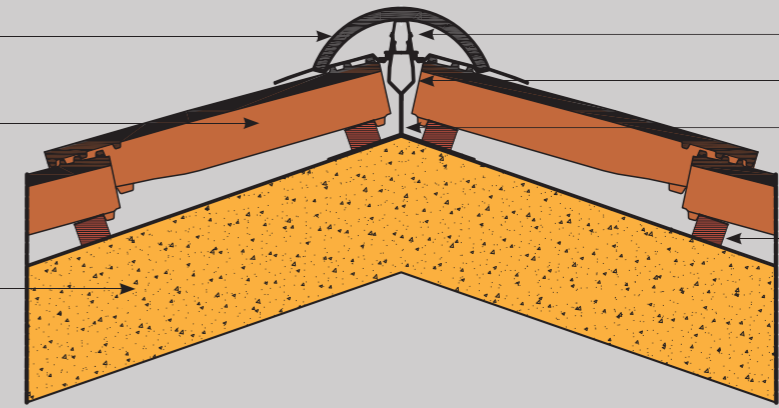

The gutter line must be perfectly perpendicular (with an angle of 90°) to the lateral ridge.

Installation of the Unicoppo Extra is well suited for metal splines (Jolly Metal Tiles) for aeration and ventilation, produced by Industrie Cotto Possagno S.p.A.

### Installation

The first column of tiles must be supported by a 30x40 mm spline perpendicular to the line of the roof gutter, if the tiles are supported on longitudinal splines, they must be of 40x40 mm if the tiles are laid directly on the rooftop. The first row of tiles must also be supported with a spline 15 mm thicker than the successive transversal splines, or by the bird protection grid.

In order to improve the chromatic yield of the roof covering, it is recommended to use products from several different pallets simultaneously.

### Items of Specification


Supply of discontinuous roof covering in earthenware tiles, made up of moulded tiles having a length of ~490 mm and a weight of ~4,2 kg and with ~12,5 pieces per m<sup>2</sup> including the relative special pieces, such as convex tiles, end pieces, aerating pieces etc. to complete the roofing. The tiles must be in conformity with norms in force and are provided with a guarantee for the Unicoppo Extra type tiles supplied by the Industrie Cotto Possagno S.p.A.

### Table of gradients for Unicoppo Extra

Gradients	from 30% to 45% (with simple laying of splines)
Gradient advised	35%
Transversal Pitch	~207 mm
Longitudinal Pitch	~370 - 380 mm
Pieces necessary per m <sup>2</sup> (depending on the overlay)	~12.5 pezzi

NOTE: For roof gradients of less than 35%, the use of a transpiring impermeabilising sheath is required.

### Table of gradients for earthenware tile roofing.

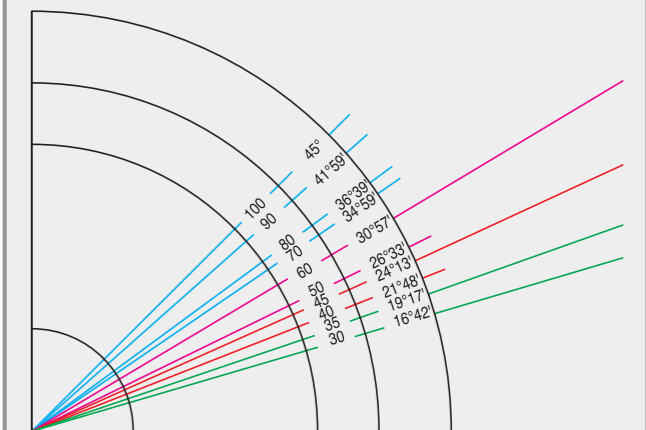

Gradients to use and overlays are indicated in the table above. Concerning the strength of the wind, refer to the Ministry of Public Works circular that divides the national territory into climatic zones (Circular n. 22631 dated 24.05.82).

Please refer to the Catalogue for any information concerning product warranty and certifications.



# Special pieces UNICOPPO

*Extra*



Convex tile T/52  
with bore

code --21



End piece:  
for Convex Tiles

code --30



Three-Way Tile  
for Convex Tiles

code --40



Two-Way Tile  
for Convex Tiles

code --42



Aerating tile  
for Unicoppo Extra  
with metallic mesh

code --50G



Chimney  
for Unicoppo Extra  
Ø 150 mm

code --62G



Unicoppo Extra  
for antennas  
with cap

code --70G



Unicoppo Extra  
Snow stopper

code --71G



Middle piece  
Unicoppo Extra

code --78G



Minitec  
Straight undertile

code --84




Minitec 45° Double face tile  
Left/Right undertile

code --85

This product complies with UNI EN 1304 – 1024 – 538 – 539/1 – 539/2 norms and the successive updates and is covered by a guarantee, which is subordinate to respect of the UNI norms in particular UNI 8178 – 8627 – 9308 – 10740 and the successive updates. The fidelity of colour, shades and tones of the sample product chosen is the maximum level permitted by our current technology, with the exception of normal variations caused by the passage of time.

Industrie Cotto Possagno S.p.A. reserves the right to make modifications and variations to this catalogue at any time, with no advance notice. This catalogue supersedes and cancels all previous editions.



INDUSTRIE COTTO POSSAGNO S.p.A.

Via Molinetto, 80 - 31054 Possagno (TV) - Italy - info@cottopossagno.com - www.cottopossagno.com

Sales Office: Ph. +39 0423 920.777 - Fax +39 0423 920.707 - Ventilated Roofs Division: Ph. +39 0423 920.701 - Fax +39 0423 920.703